Combination Switched Socket — AB66CV Surface Mounting

INGRESS PROTECTION

IP66

Approval numbers and compliance certificates for this range are available on request — contact us.

RATED VOLTAGE

250 / 500 V AC

RATED FREQUENCY

50 / 60 Hz

UTILISATION CATEGORY

AC22A

DIMENSIONS

102 × 190 mm (84 × 173 mm centres), 76.5 mm deep

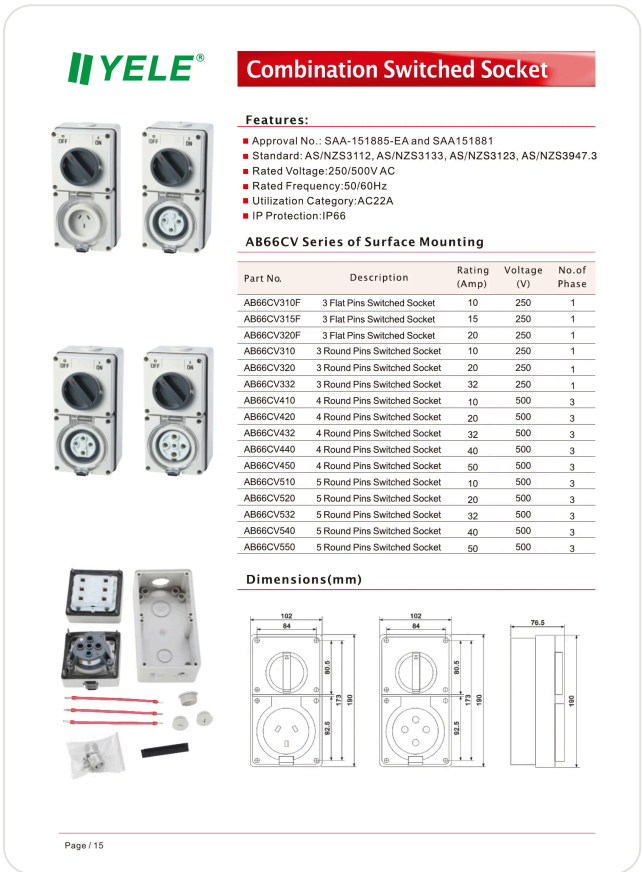

YELE®

Combination Switched Socket

Features:

- Approval No.: SAA-151885-EA and SAA151881
- Standard: AS/NZS3112, AS/NZS3133, AS/NZS3123, AS/NZS3947.3
- Rated Voltage:250/500V AC
- Rated Frequency:50/60Hz
- Utilization Category:AC22A
- IP Protection:IP66

AB66CV Series of Surface Mounting

Part No.	Description	Rating (Amp)	Voltage (V)	No.of Phase
AB66CV310F	3 Flat Pins Switched Socket	10	250	1
AB66CV315F	3 Flat Pins Switched Socket	15	250	1
AB66CV320F	3 Flat Pins Switched Socket	20	250	1
AB66CV310	3 Round Pins Switched Socket	10	250	1
AB66CV320	3 Round Pins Switched Socket	20	250	1
AB66CV332	3 Round Pins Switched Socket	32	250	1
AB66CV410	4 Round Pins Switched Socket	10	500	3
AB66CV420	4 Round Pins Switched Socket	20	500	3
AB66CV432	4 Round Pins Switched Socket	32	500	3
AB66CV440	4 Round Pins Switched Socket	40	500	3
AB66CV450	4 Round Pins Switched Socket	50	500	3
AB66CV510	5 Round Pins Switched Socket	10	500	3
AB66CV520	5 Round Pins Switched Socket	20	500	3
AB66CV532	5 Round Pins Switched Socket	32	500	3
AB66CV540	5 Round Pins Switched Socket	40	500	3
AB66CV550	5 Round Pins Switched Socket	50	500	3

Dimensions(mm)

Page / 15

Dimensions and product views