Corrugated Conduit

PVC corrugated flexible conduit — lightweight, fast to install with no special tools, and winds around irregular curves and corners.

STANDARD
AS/NZS 2053 · AS/NZS 61386

MATERIAL
PVC

COMPRESSION STRENGTH
> 320 N / 5 cm

COLOURS
Medium duty grey · Heavy duty orange · Heavy duty grey solar

MARKS
SAA · SAI Global · BEP Approved

ORDER CODE	DUTY	NOMINAL SIZE	INSIDE DIA. MIN (mm)	OUTER DIA. (mm)	COIL LENGTH
Y-MDCC20-20G	Medium, grey	20	14.1	20 +0 / −0.3	20 m
Y-MDCC50-20G	Medium, grey	20	14.1	20 +0 / −0.3	50 m
Y-MDCC20-25G	Medium, grey	25	18.3	25 +0 / −0.4	20 m
Y-MDCC20-32G	Medium, grey	32	24.3	32 +0 / −0.4	20 m
Y-MDCC10-50G	Medium, grey	50	39.6	50 +0 / −0.5	10 m
Y-HDCC10-25O	Heavy, orange	25	16.5	25 +0 / −0.4	10 m
Y-HDCC10-32O	Heavy, orange	32	22.0	32 +0 / −0.4	10 m
Y-HDCC10-40O	Heavy, orange	40	28.3	40 +0 / −0.4	10 m
Y-HDCC10-50O	Heavy, orange	50	36.0	50 +0 / −0.5	10 m
Y-HDSCC50-25G	Heavy, grey solar	25	16.5	25 +0 / −0.4	50 m

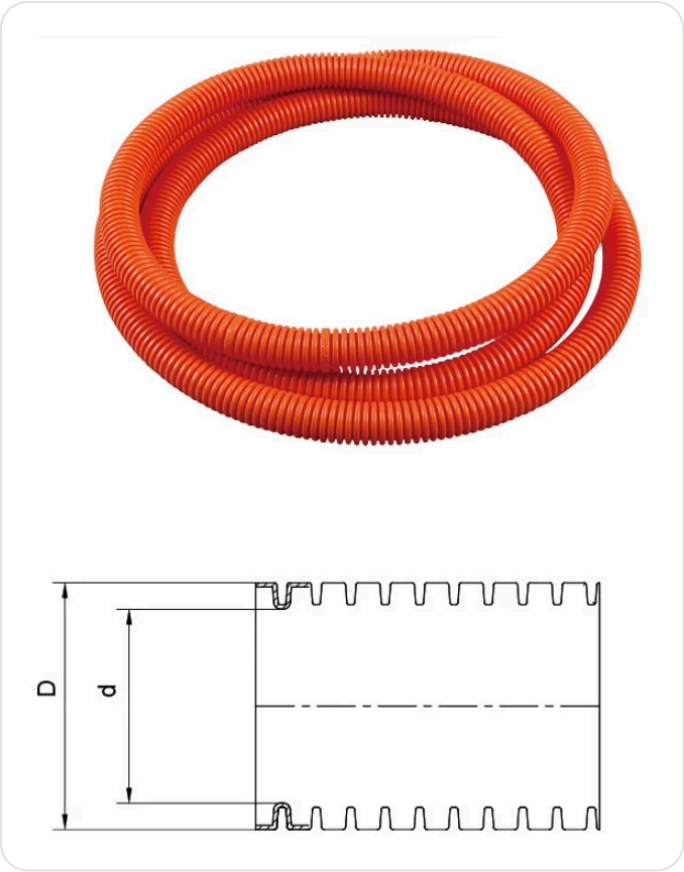

Product view and profile