Distribution Board — Flush Mounting

INGRESS PROTECTION

IP40

Approval numbers and compliance certificates for this range are available on request — contact us.

ELECTRIC RATINGS

up to 100 A, 240 / 415 V, AC 50/60 Hz

ON-LOAD CURRENT

100 A single phase / 63 A three phase

BODY MATERIAL

HIPS, ABS, ABS-UV fire resistant

TRANSPARENT DOOR

AS, UV resistant PC

/D SUFFIX

Deeper body variant

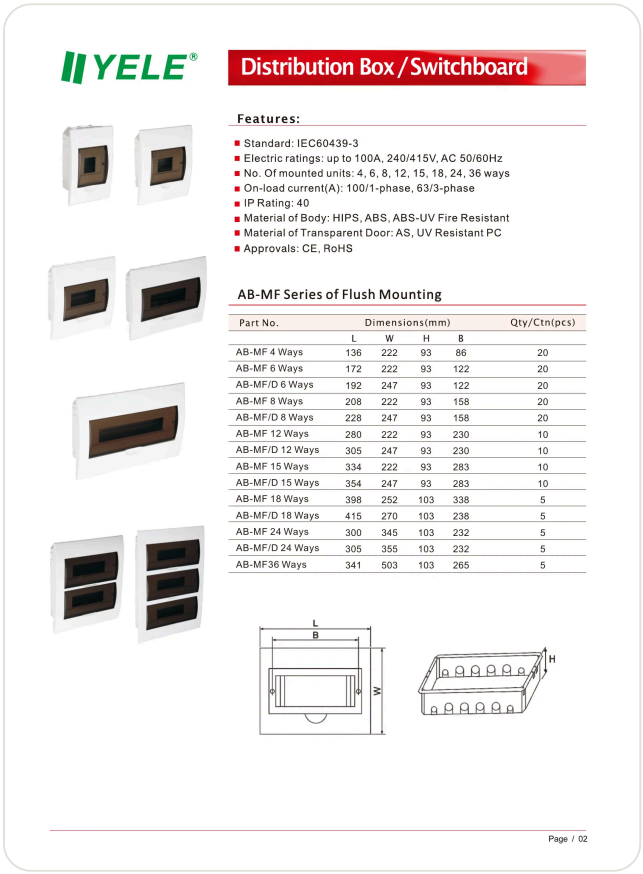

YELE®

Distribution Box / Switchboard

Features:

- Standard: IEC60439-3
- Electric ratings: up to 100A, 240/415V, AC 50/60Hz
- No. Of mounted units: 4, 6, 8, 12, 15, 18, 24, 36 ways
- On-load current(A): 100/1-phase, 63/3-phase
- IP Rating: 40
- Material of Body: HIPS, ABS, ABS-UV Fire Resistant
- Material of Transparent Door: AS, UV Resistant PC
- Approvals: CE, RoHS

AB-MF Series of Flush Mounting

Part No.	Dimensions(mm)				Qty/Ctn(pcs)
	L	W	H	B	
AB-MF 4 Ways	136	222	93	86	20
AB-MF 6 Ways	172	222	93	122	20
AB-MF/D 6 Ways	192	247	93	122	20
AB-MF 8 Ways	208	222	93	158	20
AB-MF/D 8 Ways	228	247	93	158	20
AB-MF 12 Ways	280	222	93	230	10
AB-MF/D 12 Ways	305	247	93	230	10
AB-MF 15 Ways	334	222	93	283	10
AB-MF/D 15 Ways	354	247	93	283	10
AB-MF 18 Ways	398	252	103	338	5
AB-MF/D 18 Ways	415	270	103	238	5
AB-MF 24 Ways	300	345	103	232	5
AB-MF/D 24 Ways	305	355	103	232	5
AB-MF36 Ways	341	503	103	265	5

Page / 02

Dimensions and product views