# Distribution Board — Surface Mounting

INGRESS PROTECTION

**IP40**

Approval numbers and compliance certificates for this range are available on request — contact us.

ELECTRIC RATINGS

up to 100 A, 240 / 415 V, AC 50/60 Hz

ON-LOAD CURRENT

100 A single phase / 63 A three phase

BODY MATERIAL

HIPS, ABS, ABS-UV fire resistant

TRANSPARENT DOOR

AS, UV resistant PC

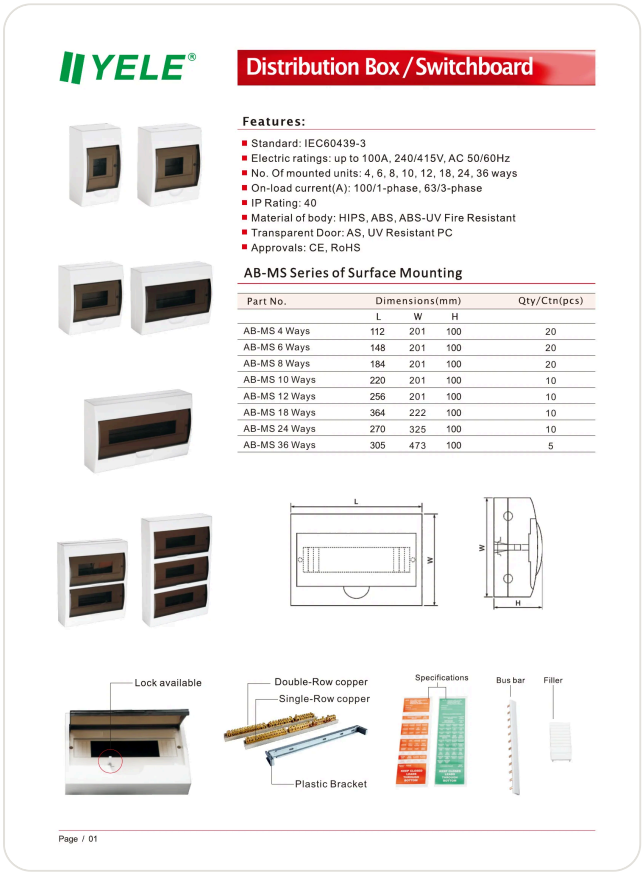
YELE®

Distribution Box / Switchboard

Features:

- Standard: IEC60439-3
- Electric ratings: up to 100A, 240/415V, AC 50/60Hz
- No. Of mounted units: 4, 6, 8, 10, 12, 18, 24, 36 ways
- On-load current(A): 100/1-phase, 63/3-phase
- IP Rating: 40
- Material of body: HIPS, ABS, ABS-UV Fire Resistant
- Transparent Door: AS, UV Resistant PC
- Approvals: CE, RoHS

AB-MS Series of Surface Mounting

| Part No. | Dimensions(mm) | | | Qty/Ctn(pcs) |
|---|---|---|---|---|
| | L | W | H | |
| AB-MS 4 Ways | 112 | 201 | 100 | 20 |
| AB-MS 6 Ways | 148 | 201 | 100 | 20 |
| AB-MS 8 Ways | 184 | 201 | 100 | 20 |
| AB-MS 10 Ways | 220 | 201 | 100 | 10 |
| AB-MS 12 Ways | 256 | 201 | 100 | 10 |
| AB-MS 18 Ways | 364 | 222 | 100 | 10 |
| AB-MS 24 Ways | 270 | 325 | 100 | 10 |
| AB-MS 36 Ways | 305 | 473 | 100 | 5 |



Page / 01

Dimensions and product views