MCB — Miniature Circuit Breaker

High-performance miniature circuit breakers for overload and short-circuit protection, 1 to 63 A, with lockable toggle and pin or fork busbar connection.

APPROVAL NO.	CERTIFIED TO
SAA-230470-EA	AS/NZS 60898.1

POLES
1P (18 mm) · 3P (54 mm)

RATED VOLTAGE
230/240V AC (1P), 400/415V AC (3P), 50/60 Hz

TRIPPING CURVE
C

BREAKING CAPACITY (ICN)
6 kA

ENERGY LIMITING CLASS
3

OPERATING TEMPERATURE
−5 °C to +40 °C

TERMINAL CAPACITY
Up to 25 mm² (top and bottom)

TERMINAL TORQUE
1.3 N·m

MOUNTING
35 mm DIN rail

ORDER CODE	RATED CURRENT (A)	POLES	CURVE
MYLNM26-63-C10	10	1P	C
MYLNM26-63-C16	16	1P	C
MYLNM26-63-C20	20	1P	C
MYLNM26-63-C25	25	1P	C
MYLNM26-63-C32	32	1P	C
MYLNM26-63-C40	40	1P	C
MYLNM26-63-C50	50	1P	C
MYLNM26-63-C63	63	1P	C
MYLNM26-63-3P-C25	25	3P	C
MYLNM26-63-3P-C32	32	3P	C
MYLNM26-63-3P-C40	40	3P	C
MYLNM26-63-3P-C50	50	3P	C
MYLNM26-63-3P-C63	63	3P	C

Approval SAA-230470-EA (AS/NZS 60898.1), valid until November 2027.

Product view

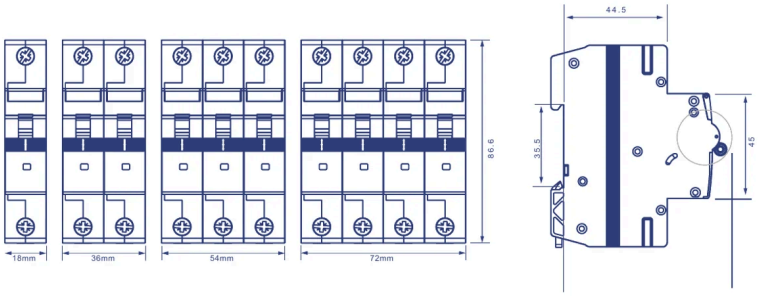

Dimensions (mm)

Product view (3 pole) and dimensions (mm) — 1, 2, 3 and 4 pole