Mini Weatherproof Switches

INGRESS PROTECTION

IP66

Approval numbers and compliance certificates for this range are available on request — contact us.

DIMENSIONS

86 × 86 × 81 mm

HANDLE

Large rotary, operable with gloved hands

PADLOCK FACILITY

8 mm pole, OFF position

CONDUIT ENTRIES

2 × 25 mm plain, 2 × 20 mm and 1 × 20 mm each side, 1 × 25 mm rear for back wiring

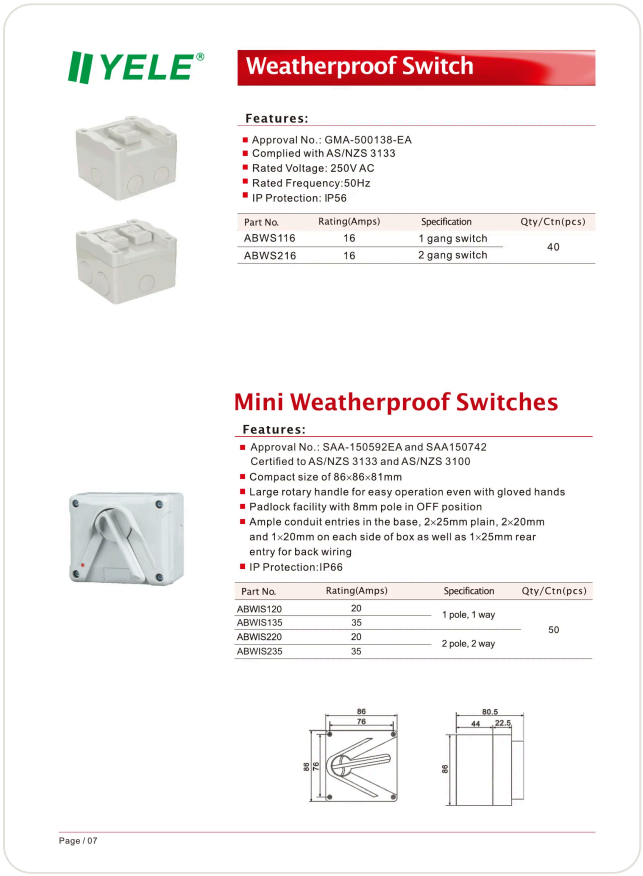

YELE®

Weatherproof Switch

Features:

- Approval No.: GMA-500138-EA
- Complied with AS/NZS 3133
- Rated Voltage: 250V AC
- Rated Frequency:50Hz
- IP Protection: IP56

Part No.	Rating(Amps)	Specification	Qty/Ctn(pcs)
ABWS116	16	1 gang switch	40
ABWS216	16	2 gang switch	

Mini Weatherproof Switches

Features:

- Approval No.: SAA-150592EA and SAA150742 Certified to AS/NZS 3133 and AS/NZS 3100
- Compact size of 86×86×81mm
- Large rotary handle for easy operation even with gloved hands
- Padlock facility with 8mm pole in OFF position
- Ample conduit entries in the base, 2×25mm plain, 2×20mm and 1×20mm on each side of box as well as 1×25mm rear entry for back wiring
- IP Protection:IP66

Part No.	Rating(Amps)	Specification	Qty/Ctn(pcs)
ABWIS120	20	1 pole, 1 way	50
ABWIS135	35		
ABWIS220	20	2 pole, 2 way	
ABWIS235	35		

Page / 07

Dimensions and product views