RCBO 1P+N — Compact 1 Module

Combined RCD and MCB in a single 18 mm module, with switched neutral. Line and load can be connected top or bottom.

APPROVAL NO.	CERTIFIED TO
SAA-221314-EA	AS/NZS 61009.1

POLES
1P+N (switched neutral)

WIDTH
18 mm (1 module)

RATED VOLTAGE
230/240V AC, 50/60 Hz

TRIPPING CURVE
B, C

RESIDUAL CURRENT TYPE
Type A, Type AC

RATED RESIDUAL CURRENT (IΔN)
30 mA

BREAKING CAPACITY (ICN)
6 kA

RESIDUAL MAKING & BREAKING (IΔM)
500 A

ENERGY LIMITING CLASS
3

MOUNTING
35 mm DIN rail

ORDER CODE	RATED CURRENT (A)	POLES
MYL25-10	10	1P+N
MYL25-16	16	1P+N
MYL25-20	20	1P+N
MYL25-25	25	1P+N
MYL25-32	32	1P+N

Approval SAA-221314–EA (AS/NZS 61009.1), valid until September 2027.

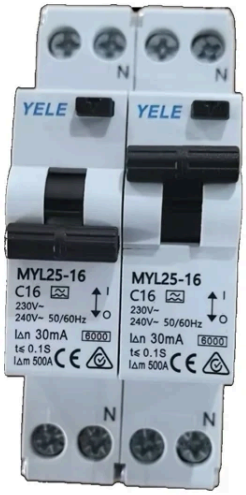

Product view

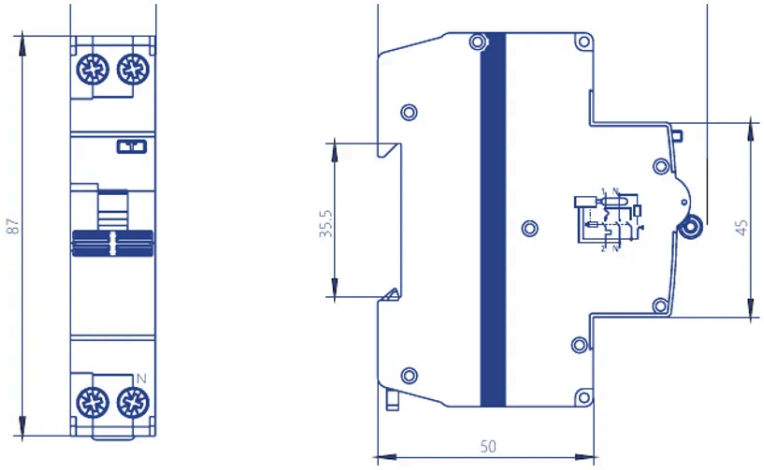

Dimensions (mm)

Product view and dimensions (mm)