RCBO 1P+N — Neutral Flying Lead

Compact 18 mm RCBO with a neutral flying lead for fast connection, solid neutral pole and busbar-compatible terminals.

APPROVAL NO.	CERTIFIED TO
SAA-230970-EA	AS/NZS 61009.1

POLES
1P+N (solid neutral)

WIDTH
18 mm (1 module)

RATED VOLTAGE
230/240V AC, 50/60 Hz

TRIPPING CURVE
C

RESIDUAL CURRENT TYPE
Type A

RATED RESIDUAL CURRENT (IΔN)
30 mA

BREAKING CAPACITY (ICN)
6 kA

RESIDUAL MAKING & BREAKING (IΔM)
6000 A

NEUTRAL LEAD
80 cm

ENERGY LIMITING CLASS
3

MOUNTING
35 mm DIN rail

OPERATING TEMPERATURE
Down to –25 °C

ORDER CODE	RATED CURRENT (A)	POLES
MYLNL30-10	10	1P+N
MYLNL30-16	16	1P+N
MYLNL30-20	20	1P+N
MYLNL30-25	25	1P+N
MYLNL30-32	32	1P+N

Approval SAA-230970-EA (AS/NZS 61009.1), valid until August 2028.

Product view

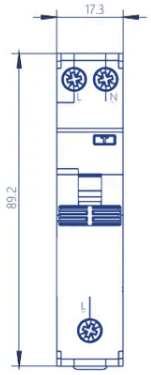

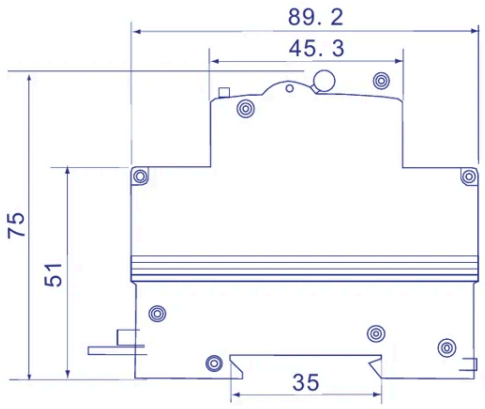

Dimensions (mm)

Product view and dimensions (mm)