RCBO 3P+N — 4 Module

Three-phase RCBO with neutral, combining earth-leakage, overload and short-circuit protection in a 72 mm, 4-module body with test button and contact position indicators.

APPROVAL NO.	CERTIFIED TO
SAA-241565-EA	AS/NZS 61009.1 · IEC 61009-1

POLES	WIDTH	HEIGHT / DEPTH
3P+N	72 mm (4 modules)	82 mm / 65 mm
RATED VOLTAGE	**TRIPPING CURVE**	**RATED RESIDUAL CURRENT (IΔN)**
415V AC, 50/60 Hz	C	30 mA
BREAKING CAPACITY (ICN)	**TRIPPING TIME**	**MOUNTING**
6 kA	≤ 0.1 s	35 mm DIN rail

ORDER CODE	RATED CURRENT (A)	POLES
MYLNL7-40-20C	20	3P+N
MYLNL7-40-25C	25	3P+N
MYLNL7-40-32C	32	3P+N
MYLNL7-40-40C	40	3P+N
MYLNL7-40-50C	50	3P+N
MYLNL7-40-63C	63	3P+N

Approval SAA-241565-EA (AS/NZS 61009.1), as marked on each device. Test monthly using the T button.

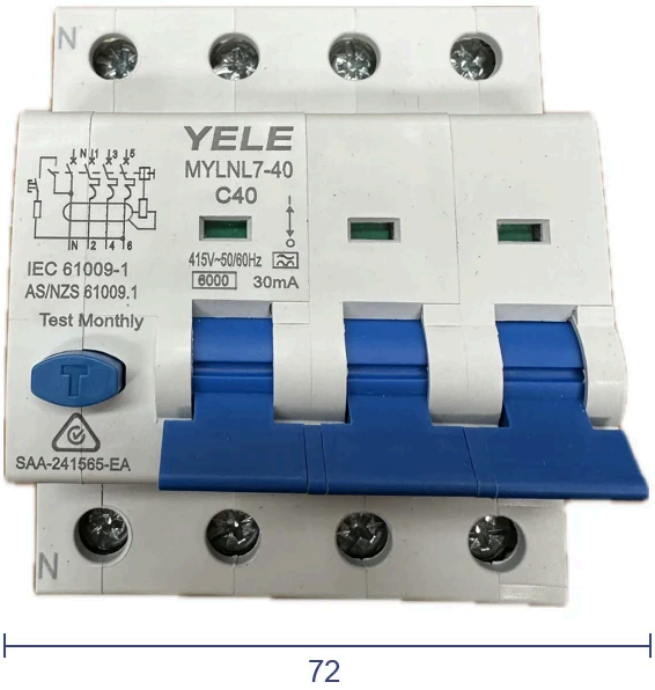

Product view

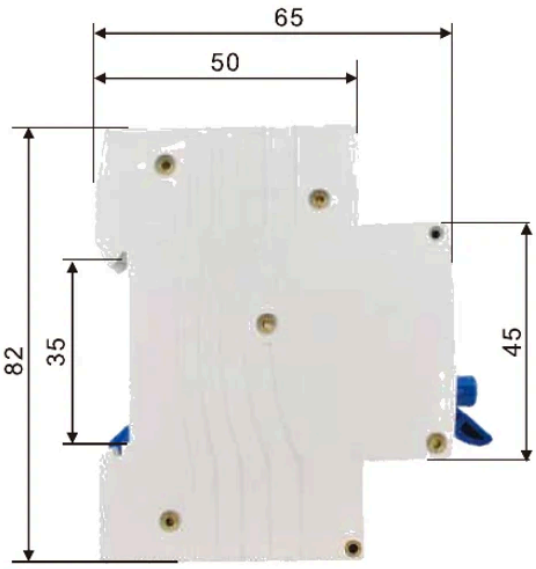

Dimensions (mm)

Product view and dimensions (mm)