Screwed Coupling

Plain-to-screwed coupling: solvent-weld one end onto rigid conduit, thread the other into a fitting.

STANDARD
AS/NZS

COLOUR
Grey

MARKS
SAA · SAI Global · BEP Approved

ORDER CODE	NOMINAL SIZE	D (mm)	D (mm)	L (mm)	H (mm)
Y-CPS25G	25	29.1	25.25	22.8	36
Y-CPS32G	32	37.3	32.25	29.5	49.4

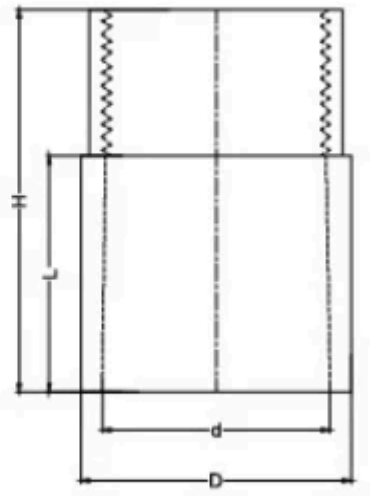

Product view and dimensions