Weatherproof Isolator

INGRESS PROTECTION

IP66

Approval numbers and compliance certificates for this range are available on request — contact us.

RATED VOLTAGE

250 V (1P) / 500 V (2P, 3P, 4P)

RATED FREQUENCY

50 / 60 Hz

UTILISATION CATEGORY

AC22A / AC23A

CONDUIT ENTRIES

Dual 25 mm screwed, top and bottom

SUPPLIED WITH

Fixed neutral and earth bars

ENCLOSURE

173 mm high × 126 mm, 51 / 83 mm deep

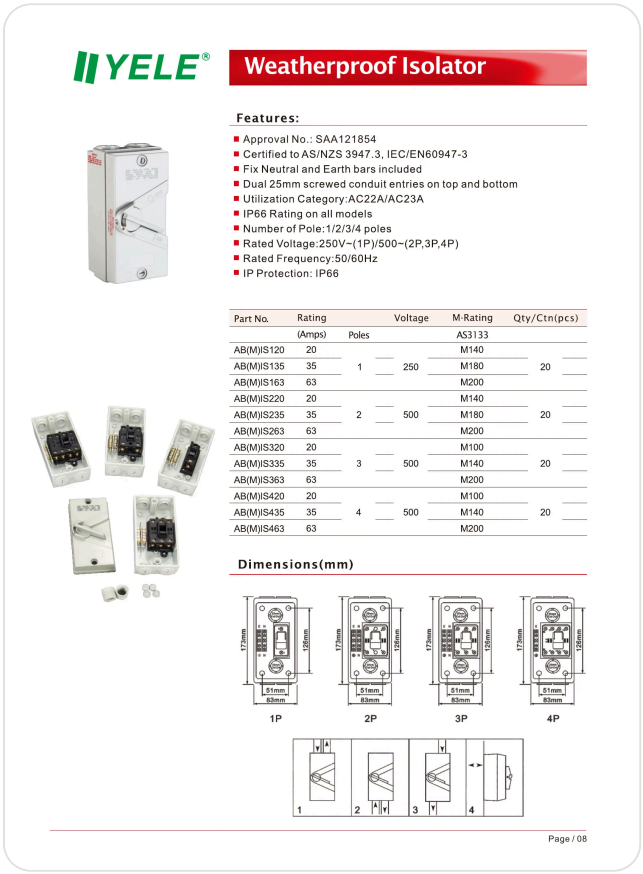

YELE®

Weatherproof Isolator

Features:

- Approval No.: SAA121854
- Certified to AS/NZS 3947.3, IEC/EN60947-3
- Fix Neutral and Earth bars included
- Dual 25mm screwed conduit entries on top and bottom
- Utilization Category:AC22A/AC23A
- IP66 Rating on all models
- Number of Pole:1/2/3/4 poles
- Rated Voltage:250V~(1P)/500~(2P,3P,4P)
- Rated Frequency:50/60Hz
- IP Protection: IP66

Part No.	Rating (Amps)	Poles	Voltage	M-Rating AS3133	Qty/Ctn(pcs)
AB(M)IS120	20	1	250	M140	20
AB(M)IS135	35			M180	
AB(M)IS163	63			M200	
AB(M)IS220	20	2	500	M140	20
AB(M)IS235	35			M180	
AB(M)IS263	63			M200	
AB(M)IS320	20	3	500	M100	20
AB(M)IS335	35			M140	
AB(M)IS363	63			M200	
AB(M)IS420	20	4	500	M100	20
AB(M)IS435	35			M140	
AB(M)IS463	63			M200	

Dimensions(mm)

1P 2P 3P 4P

Page / 08

Dimensions and product views