Smart Switch Range

Wi-Fi touch switches, dimmers, curtain switches, smart power points and switch modules for Australian homes. Works with Google Assistant, Amazon Alexa and the Smart Life app.

5-year warranty
on every product in the range.

SAA approved
certificate number marked on the back of each product.

White or black
PC housing with acrylic front panel.

App, voice and multi-way
Control from the switch, the Smart Life app, Google Assistant or Amazon Alexa.

Wi-Fi + Bluetooth set-up
Pairs over Bluetooth and runs on 2.4 GHz Wi-Fi — no hub needed.

Power-on state
Choose what each gang does after a power cut: off, on, or its last state.

Backlight on/off
Touch-key backlight can be turned off in the app.

Timers & schedules
Daily schedules and countdown timers from the app.

Smart Touch Switch — Live + Neutral · YSW-1N to YSW-4N

For wall boxes with a neutral available. Each gang switches one circuit, up to 1000 W per gang.

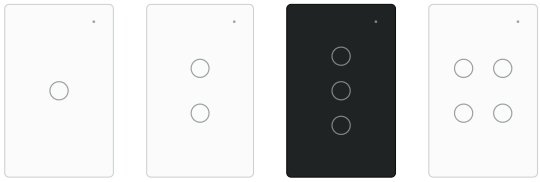



Dimensions (mm)

ORDER CODE	YSW-1N	YSW-2N	YSW-3N	YSW-4N
Gangs	1	2	3	4
Rated current	10 A			
Supply	100–240 V AC, 50/60 Hz			
Max. load	1000 W per gang			
Wiring	Live + neutral; L1–L4 outputs			
Wireless	Wi-Fi 2.4 GHz / Bluetooth			
Size (W × H × D)	74 × 118 × 33 mm			
Operating temperature	–10 to +55 °C			
Operating humidity	0–95 % RH, non-condensing			
App	Smart Life (Android / iOS)			
Material	PC housing, acrylic front panel			
Colours	White · Black			
Warranty	5 years			

Smart Touch Switch — Live only · YSW-1L to YSW-4L

For older homes where the switch box has no neutral. Each gang switches one circuit, up to 1000 W per gang.

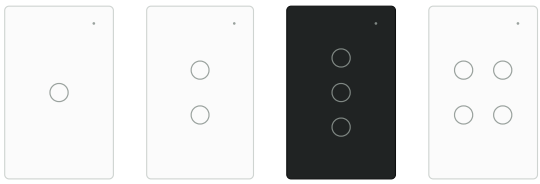



Dimensions (mm)

ORDER CODE	YSW-1L	YSW-2L	YSW-3L	YSW-4L
Gangs	1	2	3	4
Rated current	10 A			
Supply	100–240 V AC, 50/60 Hz			
Max. load	1000 W per gang			
Wiring	Live only; L1–L4 outputs			
Wireless	Wi-Fi 2.4 GHz / Bluetooth			
Size (W × H × D)	74 × 118 × 33 mm			
Operating temperature	–10 to +55 °C			
Operating humidity	0–95 % RH, non-condensing			
App	Smart Life (Android / iOS)			

ORDER CODE	YSW-1L	YSW-2L	YSW-3L	YSW-4L
Material	PC housing, acrylic front panel			
Colours	White · Black			
Warranty	5 years			

Smart Dimmer & Curtain Switch · YSW-DIM / YSW-CUR

Dimmer: brighter, on/off and dimmer keys plus brightness in the app. Curtain: open, stop and close for motorised curtains and blinds.

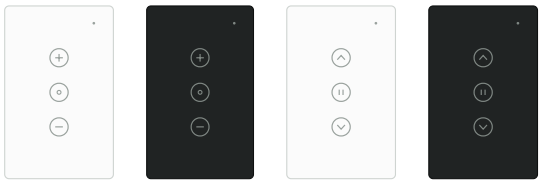



Dimensions (mm)

ORDER CODE	YSW-DIM	YSW-CUR
Product	Smart Dimmer Switch	Smart Curtain Switch
Rated current	10 A	
Supply	100–240 V AC, 50/60 Hz	
Max. load	400 W	600 W
Wireless	Wi-Fi 2.4 GHz / Bluetooth	
Size (W × H × D)	74 × 118 × 41 mm	
Operating temperature	–10 to +55 °C	
Operating humidity	0–95 % RH, non-condensing	
App	Smart Life (Android / iOS)	
Material	PC housing, acrylic front panel	
Colours	White · Black	
Warranty	5 years	

Smart Double Power Point · YSW-GPO2

Two Australian 10 A outlets, each switched by its own touch key, with timers and countdowns in the app.

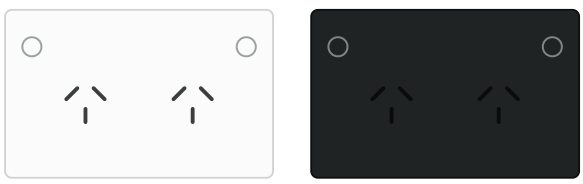

ORDER CODE	YSW-GPO2
Outlets	2 × Australian standard
Rated current	10 A
Supply	110–250 V AC
Max. load	2400 W
Wireless	Wi-Fi 2.4 GHz / Bluetooth
Size (W × H × D)	118 × 74 × 41 mm
Operating temperature	–10 to +55 °C
Operating humidity	0–95 % RH, non-condensing
App	Smart Life (Android / iOS)
Material	PC housing, acrylic front panel
Colours	White · Black
Warranty	5 years

Smart Switch Module · YSM-1 / YSM-2

Fits behind an existing standard switch, so the client keeps their plate and gains app, voice and timer control.

ORDER CODE	YSM-1	YSM-2
Gangs	1	2
Rated current	10 A	
Supply	100–240 V AC	
Max. load	2400 W	
Wireless	Wi-Fi / Bluetooth + RF	
Size (W × H × D)	42.6 × 42.6 × 20 mm	
Material	PC	
Warranty	5 years	

Must be installed by a licensed electrician in accordance with AS/NZS 3000. Compliance documents available on request — contact us.

info@yele.com.au · yele.com.au — Specifications subject to change. Google Assistant, Amazon Alexa and Smart Life are trademarks of their respective owners.